

FIG. 1

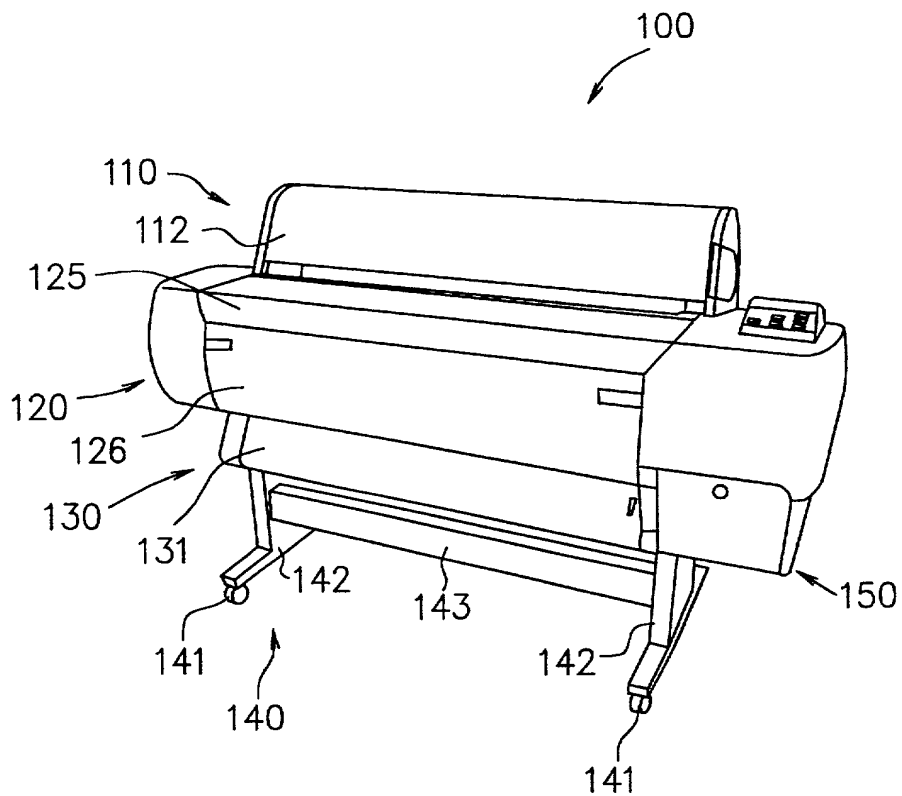


FIG. 2

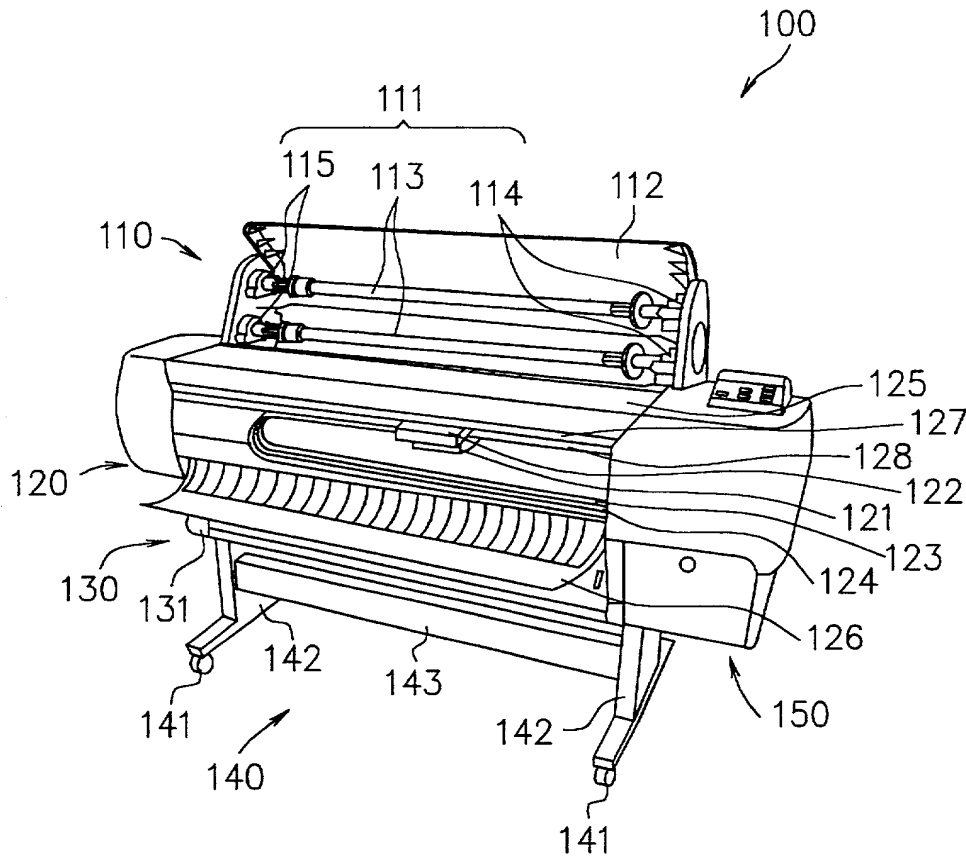


FIG. 3

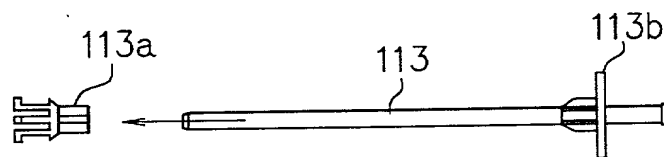


FIG. 4

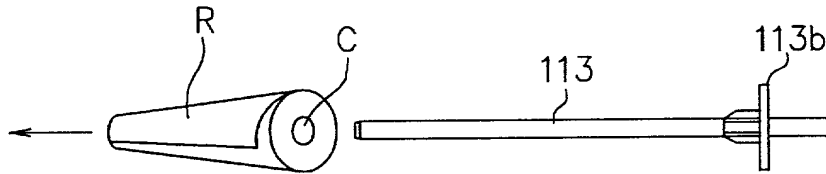


FIG. 5

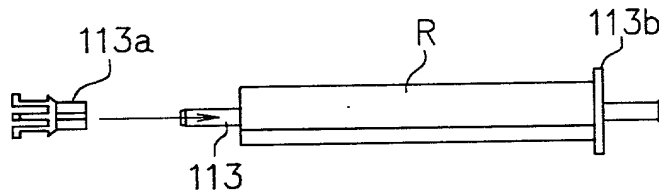


FIG. 6

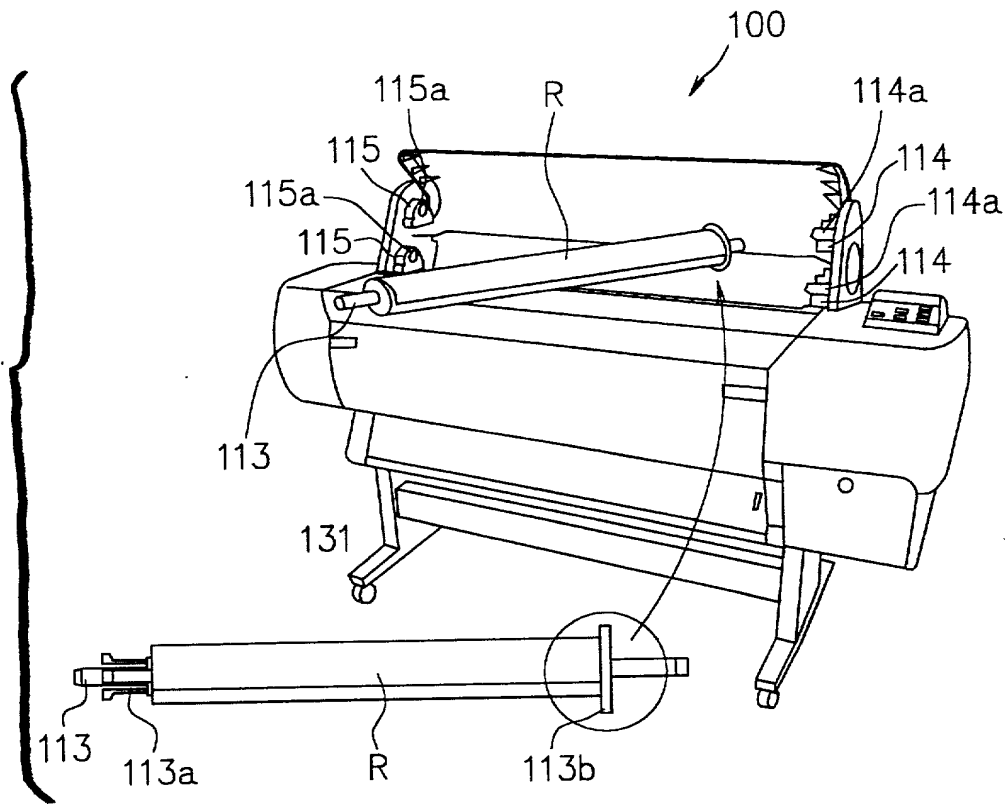


FIG. 7

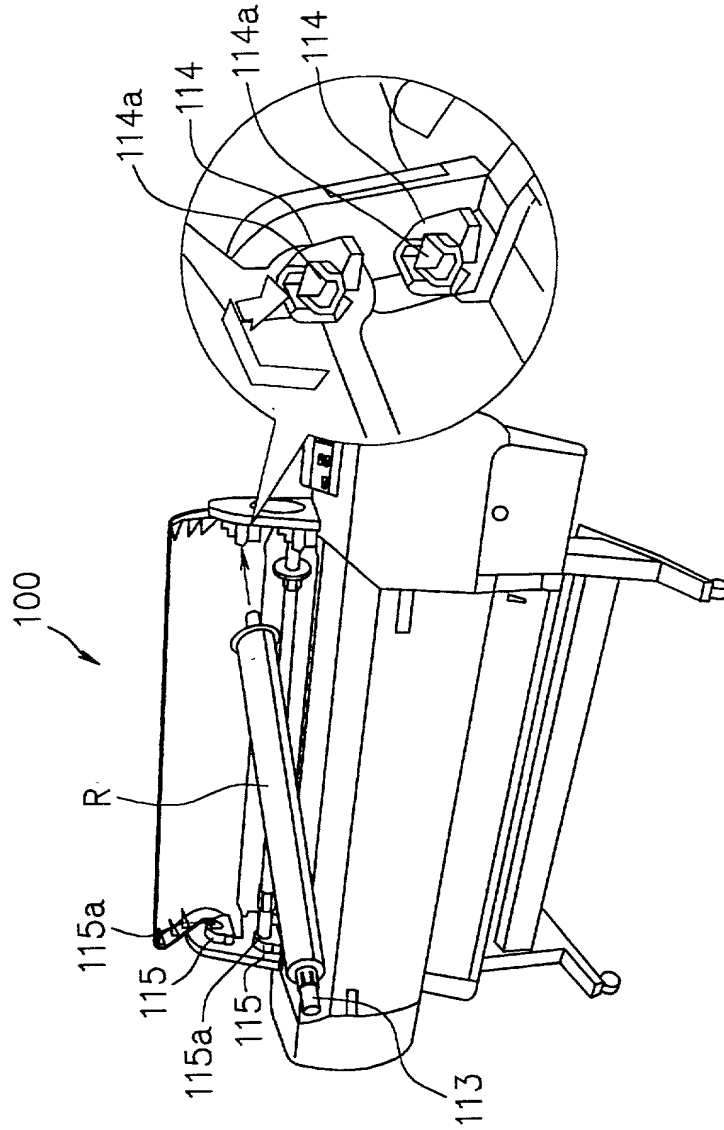


FIG. 8

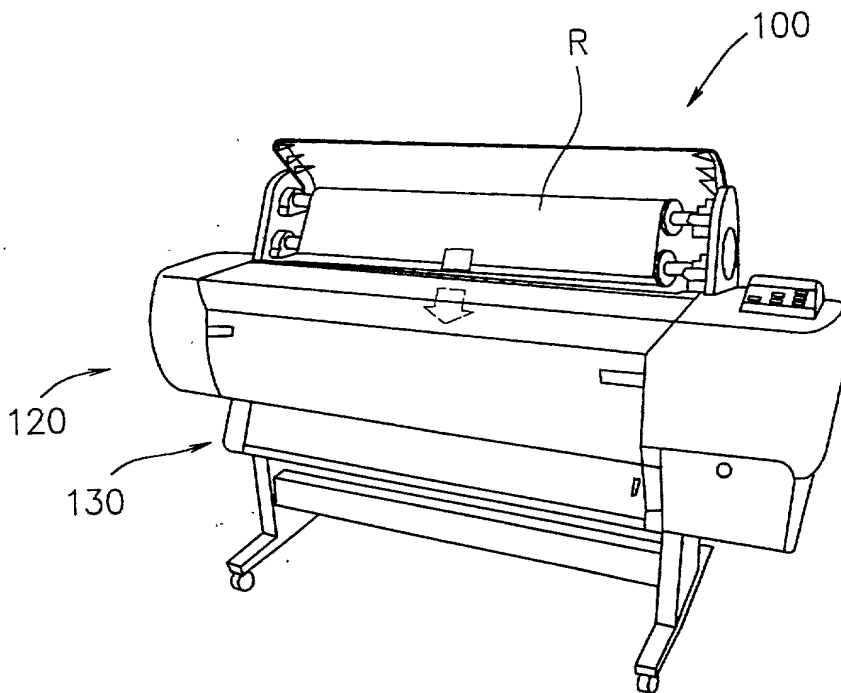




FIG. 9

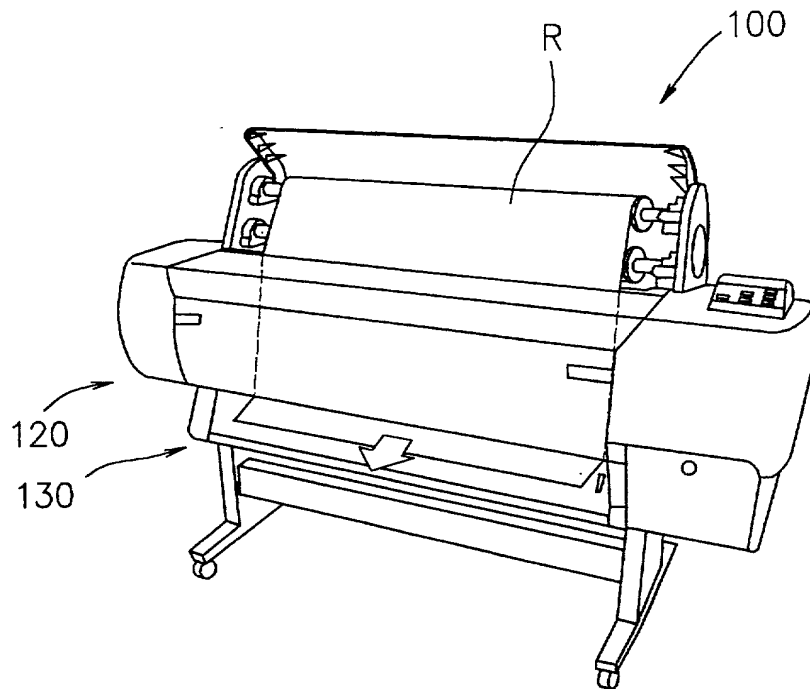


FIG. 10

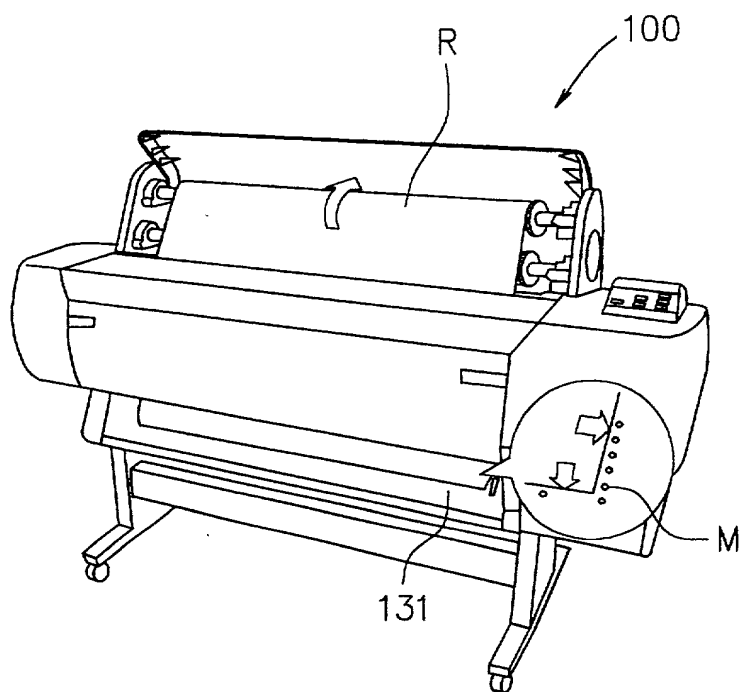


FIG. 11


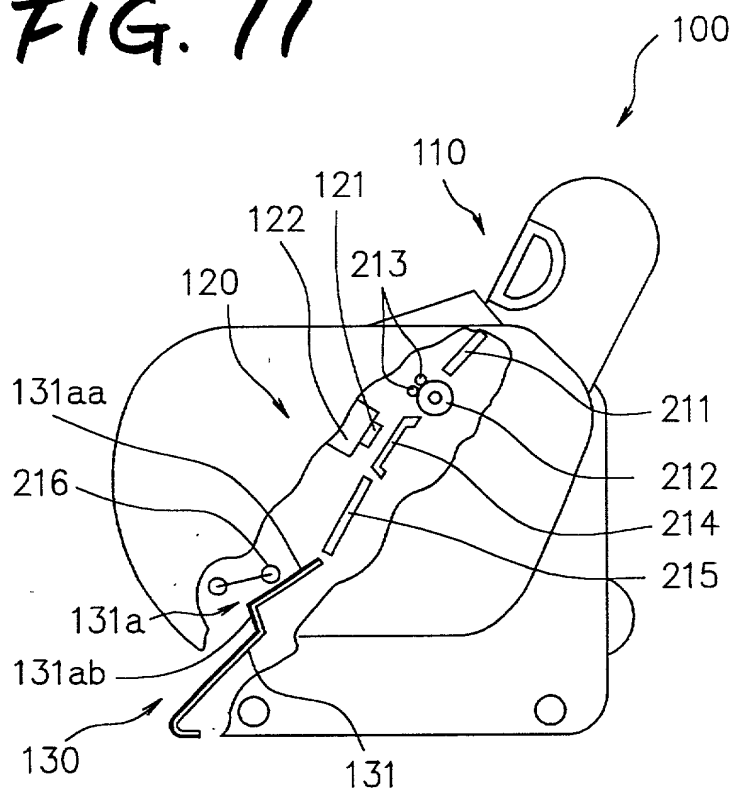


FIG. 12

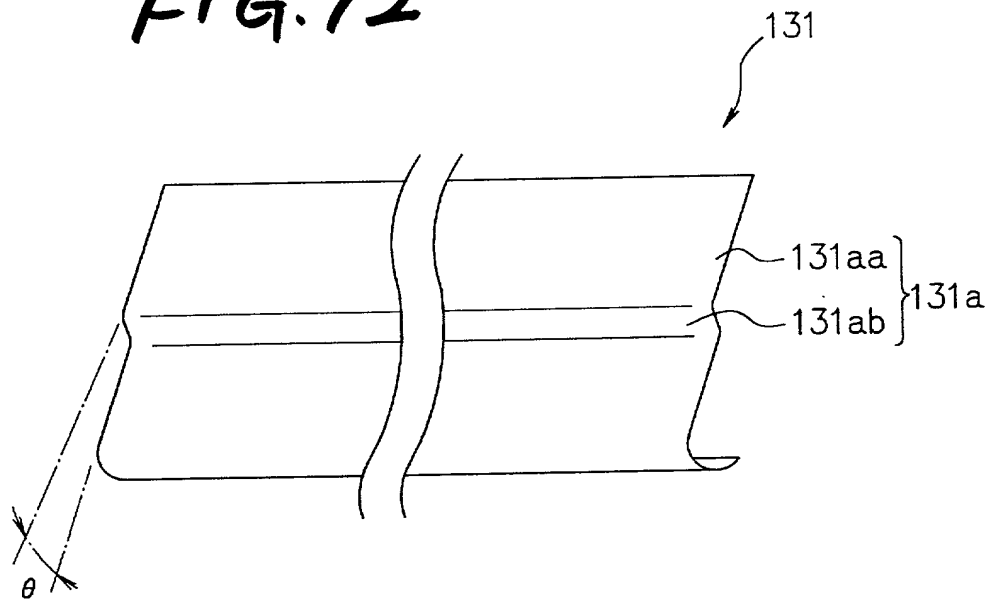

A schematic diagram showing a cross-section of a cable assembly at a bend. The cable has a core 131 with a central part 131aa. It is surrounded by a sheath 215. Labels include 121, 122, 213, R, 212, 214, 216, 131a, and 131.

[illegible]

FIG. 14

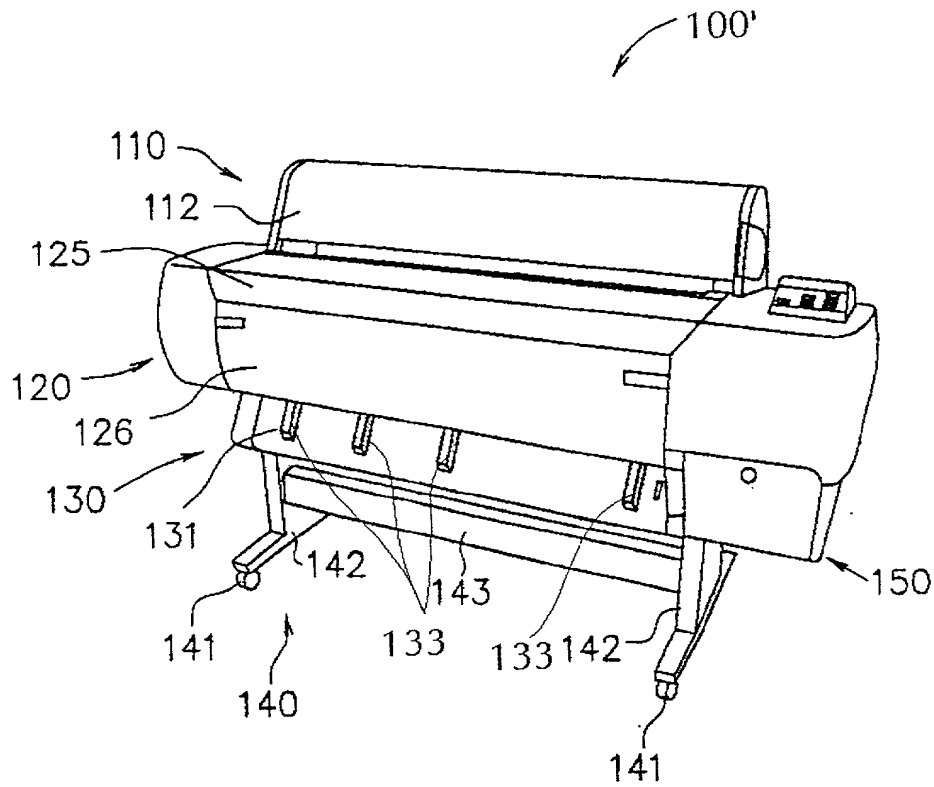


FIG. 15

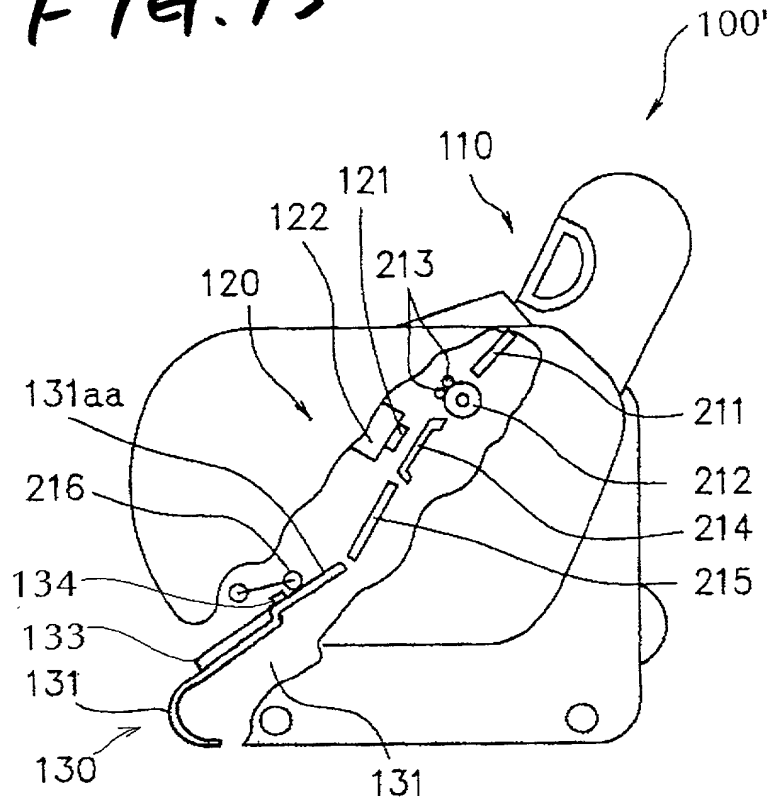


FIG. 16

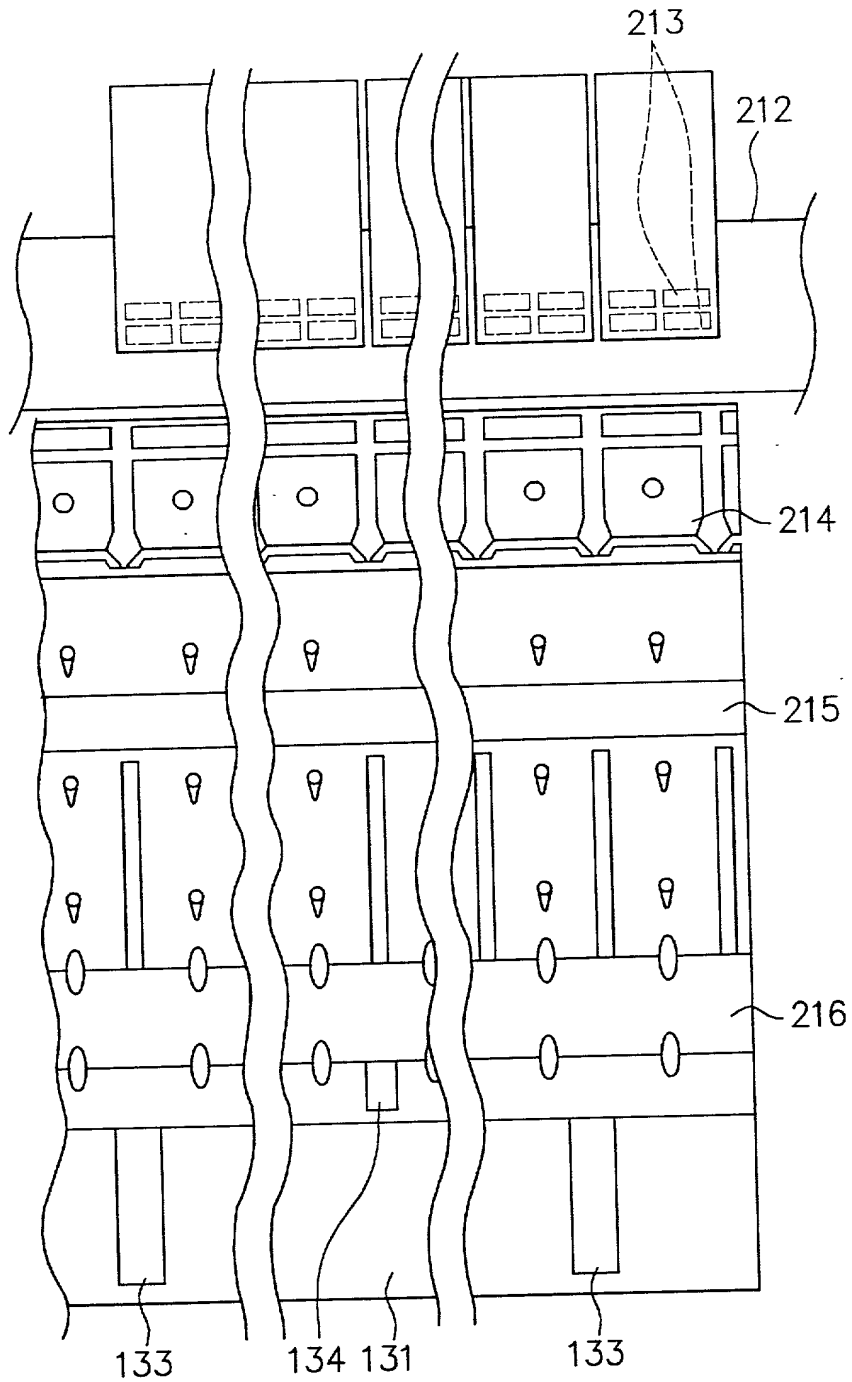




FIG. 17

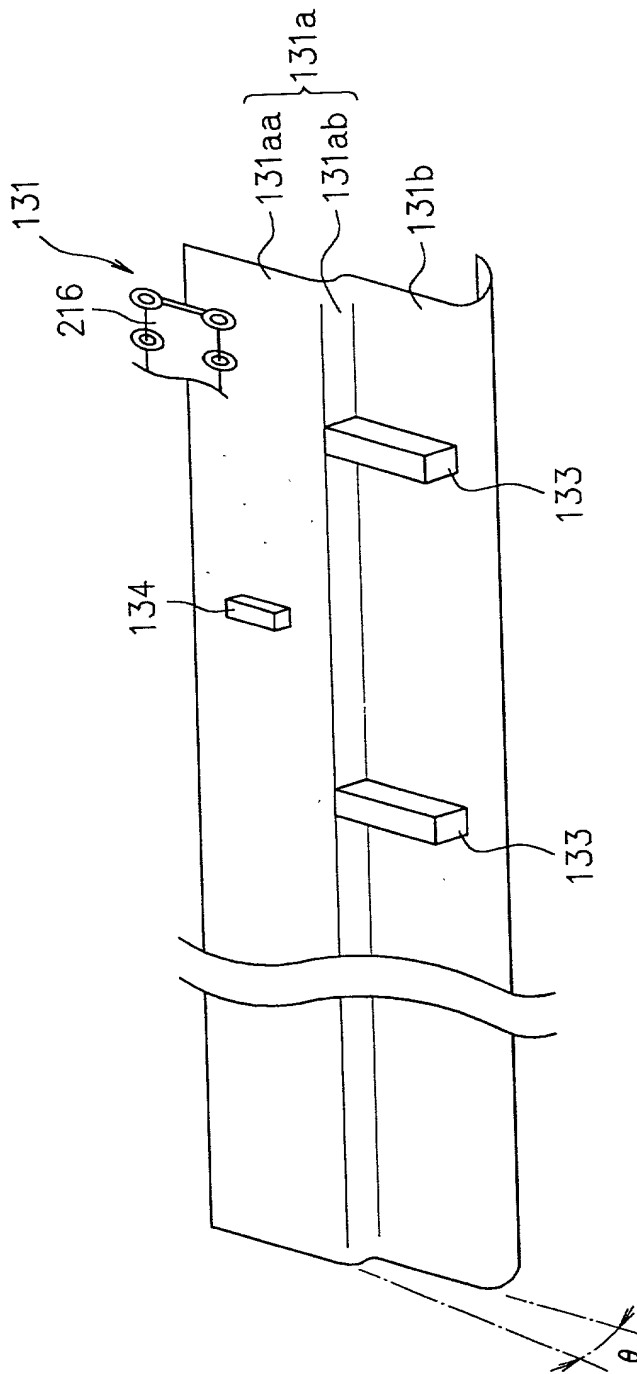


FIG. 18

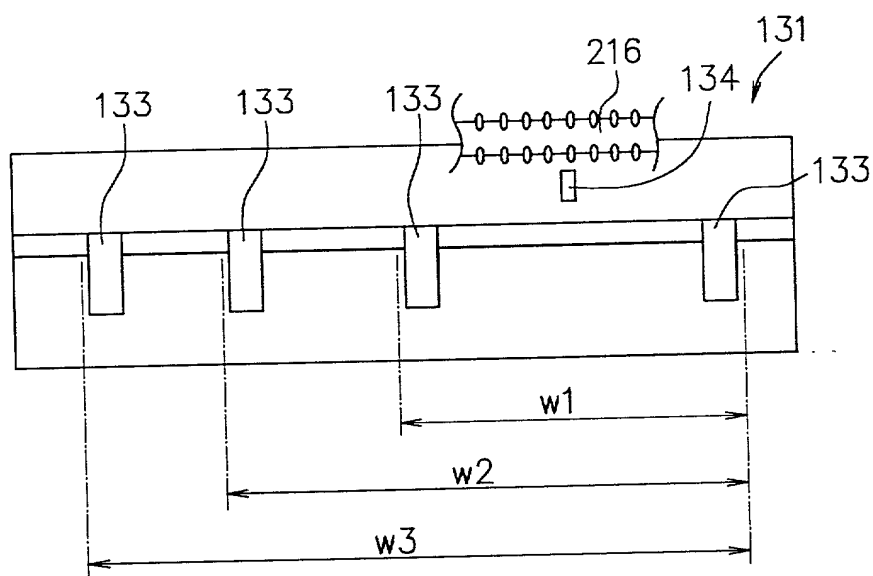


FIG. 19A

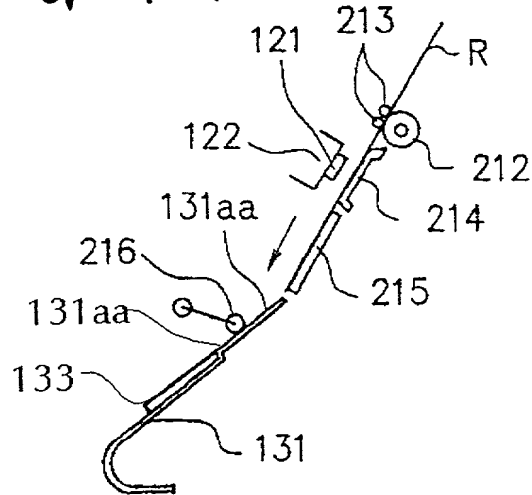


FIG. 19B

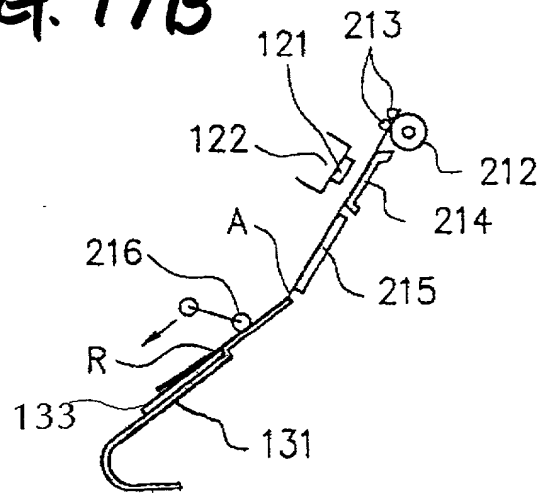


FIG. 20A

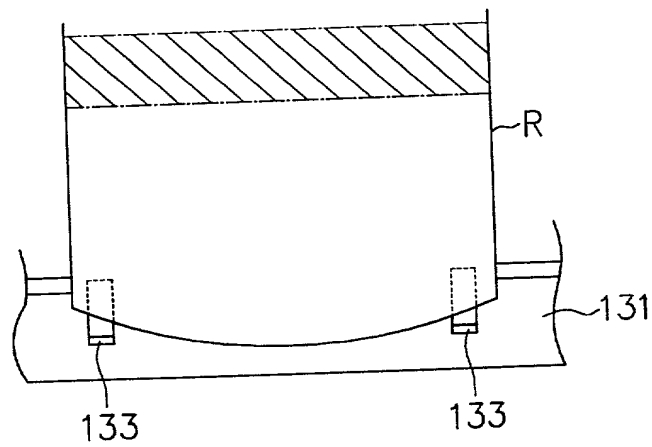


FIG. 20B



FIG. 21A

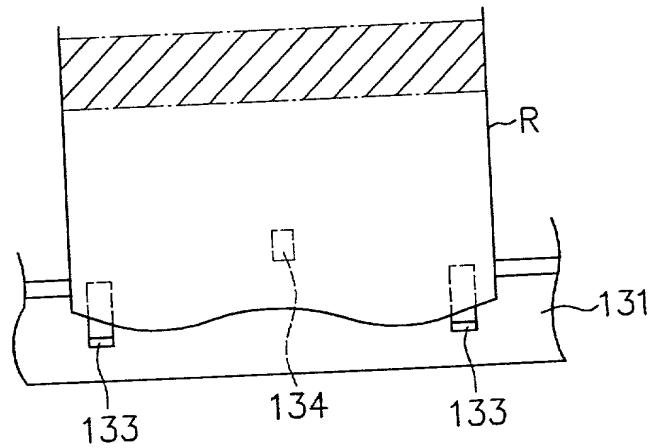


FIG. 21B

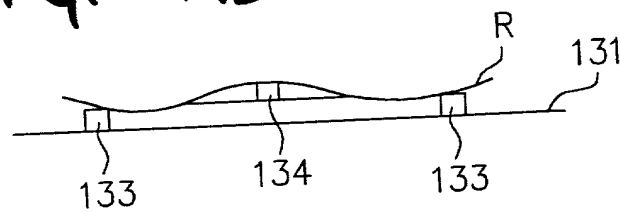


FIG. 22A

PRINTING HEAD

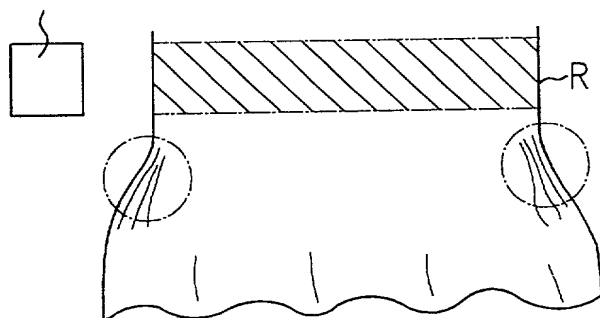


FIG. 22B

PRINTING HEAD

